

# SMOK®

G320 Kit

# SMOK®

### Specifications

#### G320 Mod

Size: 89.5x61.5x31mm  
 Weight: 215g  
 Standby Current: <500uA  
 Power Range: Max. 320W  
 Resistance Range: 0.1Ω-3Ω (VW) / 0.06Ω-3Ω (TC)  
 Temperature Range: 200°F ~600°F/100°C ~315°C

#### TFV8 Big Baby Tank

Material: Stainless Steel  
 Size: 24.5x56mm  
 Weight: 60g  
 Capacity: 5ml  
 Thread: 510

#### Verification

- Using your Smartphone or PC to visit SMOK official website: <http://www.smoktech.com/support/>
- Scratch off the coating of the security label on packing box to get the 16 anti-fake codes. Fill them into the input box on the webpage to verify. The result will come out after a few seconds.
- If you have any question, please contact SMOK consultant via e-mail, phone or our website to get more help.

2

### Components



4



#### Attach Atomizer

G320 atomizer head is using a new generation of elastic-touch design perfectly fit 510 connector atomizers. Please confirm that the atomizer head should not be blocked by any stems before attachment:  
 1) Connect the atomizer to the device and tighten it clockwise.  
 2) After the device is powered on, please press the Power Button to vape.

6

**4. Screen Locked Status:**  
 Hold the Power Button for 5s and choose POWER OFF to power off.

**5. Power Off:**  
 While the device is locked, hold Power Button for 5s, choose POWER OFF, and the screen turns off, which means the device is power off.

**6. Saving:**  
 All the settings will be automatically saved while settings done. No need to reset after power on.

**7. Menus & Prompts:**  
 After startup, fast press the POWER Button 3 times in 2s, then you will go to the operation menu. At the same time, long-press on the POWER Button has confirmed function; UP/DOWN Button could do menu moves.


8

	SCR LOCK	AUTO LOCKED ON: AUTO LOCKED OFF
	CONTRAST	Contrast range is 10-100, you can increase/decrease by UP/DOWN Button
	ADJ OHM	Can be adjusted by UP/DOWN Button
	DOWNLOAD	Upgrade the firmware by switch NO or YES
	Power ON/ OFF	POWER ON POWER OFF with "SMOK"
	Unlock/Lock	Screen locked status, fast press Power Button 5 times to unlock; Screen unlocked status, fast press Power Button to lock
	TOO HOT!	Over temperature Stop vaping, you can vape again after 30s

10

Temperature Sensing Coil Material for you to choose: TC-NI/TC-TI/TC-SS.  
 5. Enter into Adjustable Initial Resistance. You can adjust the initial resistance of your atomizer by pressing the Up/Down button.  
 6. When the screen shows "TEMPERATURE PROTECTED", the heating coil reached the maximum allowed temperature during the Vaping. If it happens, the Alien will continue to fire, but will not be able to provide the desired wattage.

#### VW Mode.

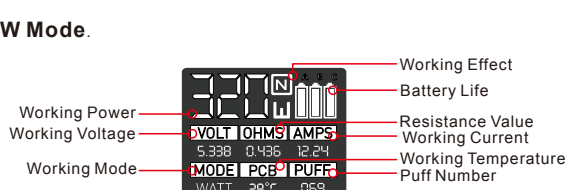

12

### Tank Operations

#### How to fill with e-liquid:

1) Hold the tank with one hand, and use another one to press top cap and move it counterclockwise.



2) Add e-liquid through the slot, and pay attention not to drip into the central airflow tube.



14

#### Control air input:

Rotate the bottom adjustable airflow system to control air input.



Adjustable Airflow Ring

If you need any additional information or have any questions about the products or its use, please contact your local SMOK agent or to visit our website [www.smoktech.com](http://www.smoktech.com)

16

### LEGAL DISCLAIMER

Underage sale is prohibited. Depending on your country/region legal smoking age. 18+ and over 21+ in other countries/regions.

#### WARNING

This product is not intended for use by persons under legal smoking age, nonsmokers, women who are pregnant or breastfeeding, or persons with or at risk of heart disease, high blood pressure, diabetes, or taking medicine for depression or asthma.

18

### Appendix 2 Screen Prompts Table

Prompts	Details
"SMOK""G320"	Power on success
"SMOK""G320"	Power off success
	Battery power isn't enough, change a battery
	Battery voltage is higher than 9V/12.5V, change a battery
NEW COIL?	Atomizer has been detected under TC Mode
	Low resistance value has been detected, replace atomizer

19

	High resistance value has been detected, replace atomizer
	Temperature protection under TC Mode
	Atomizer coil is heating without liquid under TC Mode, fill juice

20

	Coil Type
	Battery Life
	Resistance Value
	Working Current
	Working Wattage
	Puff Number

21

TC Mode is available when G320 works with a TC type atomizer.  
 1. Enter TC Mode: switch among TC Mode, VW Mode and MEMORY Mode by pressing POWER+ DOWN Button simultaneously while screen is UNLOCKED.  
 2. Use POWER+ UP Button simultaneously to switch from 15W to 220W/320W.  
 3. In the TC Mode, please use the UP / DOWN Button to adjust the temperature settings with an increment/decrement of 10 Fahrenheit degrees (about 5 Celsius degrees) to get the best preferred settings.  
 4. Enter into Coil Material Selection menu. There are three options of

22

G320 VW Mode is available for all types of atomizers.  
 1. Enter VW Mode: switch among TC Mode, VW Mode and MEMORY Mode by pressing Power Button + DOWN Button simultaneously while screen is UNLOCKED.  
 2. Use POWER+ UP Button simultaneously to switch among STRENGTH HARD, STRENGTH NORM, STRENGTH SOFT.  
 3. In the WATT Mode, use the UP / DOWN Button to adjust the wattage settings with an increment/decrement of 0.1W to get the best preferred wattage.

23

**MEMORY MODE**  
 1. Enter MEMORY Mode: switch among TC Mode, VW Mode and MEMORY Mode by pressing Power Button + DOWN Button simultaneously while screen is UNLOCKED.  
 2. Use UP/DOWN button to switch among STRENGTH HARD, STRENGTH NORM, STRENGTH SOFT.  
 3. Wait 5s or press and hold the POWER Button to set M1-M22/M32 settings; increase or decrease the wattage value by UP or DOWN button.

24

3) Close the cap carefully and firmly. Then let it stands for several minutes to get the organic cotton completely saturated.



25

**Replace atomizer core:**  
 Firstly, screw the drip tip and top cap off the tank; then screw the atomizer core off the base part, and replace with a new one.



26

**Attention**

- Before use please read the manual carefully.
- Connect the atomizer to a power source that is suitable for its intended use.
- Please avoid making the e-liquid into your mouth directly.
- Please do not keep the liquid inside the atomizer if the device is not going to be used for a long period.
- Please refill the tank when the e-liquid is nearly used out to avoid dry-burning of the atomizer.
- Please do not drop, throw or mishandle this product as the outer shell or inner components may become damaged.
- In order to prolong the operation of your product, please keep it away from excessive temperature and humid environment.
- Please keep this product away from children and pregnant women.



27

### Appendix 1 Key Function Table

Key	Function(Screen Unlock Status)	Function(Screen Locked Status)
Power	Fast click 5 times in 2s - Power On Fast click 5 times - Screen Locked Fast click 3 times in 2s - Menu Choose Hold on - Vape Release - Standby	Long press 5s - choose Power Off to turn off Fast click 5 times - Unlock Screen
UP	Click Down - Increase the temperature (TC Mode) Click Down - Increase the wattage (VW Mode)	
DOWN	Click Down - reduce the temperature (TC Mode) Click Down - reduce the wattage (VW Mode)	
Power + UP	Click Down - Change TC Effect (15-320W) or VW Effect (Hard/Norm/Soft)	
Power + DOWN	Click Down - Change Working Mode (TC / VW / MEMORY)	

28