### Wifi TRAIL CAMERA

### ViFi810



**USER MANUAL** 

**0.3**s

Detection angle

**120°** 



WiFi+App

Fast trigger time

Tel: +86 400 6874 009 E-mail: support@cnsuntek.com Website: www.cnsuntek.com

## **PACKING INCLUDES**



**◆** Camera






**◄ Mounting Strap** 



**USB Cable** ▶



**◄ Two Keypads Remote** 


## **SPECIFICATIONS**

Photo recording		
Photo resolution	20MP /16 MP /12MP	
File format	.JPG	
Time lapse mode	5min / 10min / 30min / 60min	
Multi-shot mode	Up to 9 photos per detection	
Stamp (photos and video)	Date, time, temperature (°C/°F) and	
	moon phase	
Capture mode	Camera/Video/Camera&video/Time lapse	
Video recording		
Video resolution	1080p / 720p / WVGA(480p)	
File format	.MP4 / H.264	
Video length	10 s / 30s / 60s / 90 s	
Capture mode	Colorful mode at daytime,	
	black and white mode at night	
WiFi/APP/Remote		
Scan QR code to Download	App ID: WiFiCamera	
	(iOS and Android Devices )	
Two Keypads remote	WiFi On / Off	
Memory storage		
Support	<ul><li>Internal memory: none</li></ul>	
	<ul><li>External memory : Micro SD card</li></ul>	
	(up to 64GB)	

Viewing		
Built-in screen	TFT 2.0"	
Power source		
Alkaline Battery	4xAA or 8xAA	
Lithium Battery	Rechargeable lithium AA battery	
*		
External Power Jack	DC 6~12V 1A (3.5X1.3mm)	
Detection system		
Motion Sensor	3xPIR	
Detection Angle	120°	
Detection Range	Adjustable from 1 to 20 meters	
Trigger Speed	0.3 second	
Delay between each detection	1/5/10/30 seconds, 1/5/10/30 minutes	
Night time illumination system		
Infra LEDs	44pcs LEDs	
Flash Range	< 20 meters	
Exposure	Auto / 100 / 200 / 400	
Optical field of view		
120°		
Dimensions		
135mm X 90mm X 76mm	· ·	
Recommendations		
Operating temperature	(-20 °C to +70 °C) (-4 °F to +158 °F)	

### waterproof level

IP 65

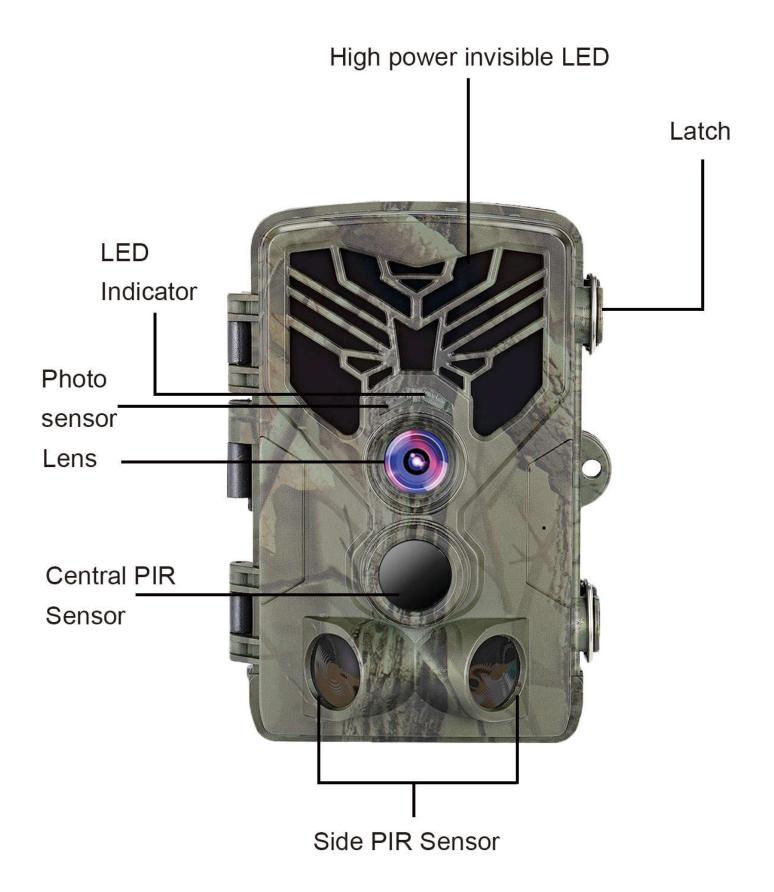



## **INSTALLING BATTERIES**







### IF USING AA -ALKALINE BATTERIES


- 1.Pull the gap lightly and open battery compartment.
- 2.Reference the battery icons located on the inside of the battery compartment. Insert the batteries according to the positive and negative battery icons.
- 3.Close the battery compartment to resist water and dust.

NOTE: Installing any of the 8-AA batteries in the wrong direction may cause the batteries to leak acid and could possibly explode, causing camera failure and damage to the battery compartment.


## BATTERIES CONT.....

# IF USING 6V DC POWER SOURCE

- 1. Remove the rubber port cap at the bottom of the camera. Using a universal 6V DC cord, plug in to the bottom port option.
- 2. Run the cord to the side of the camera where there is a hook provided behind the hinge of the camera door. This will support the power cord and take pressure off of the connection point
- 3. When not in use, replace the rubber port cap at the bottom of the camera to protect the 6V DC universal plug-in port.

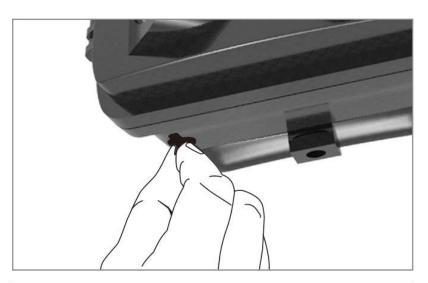



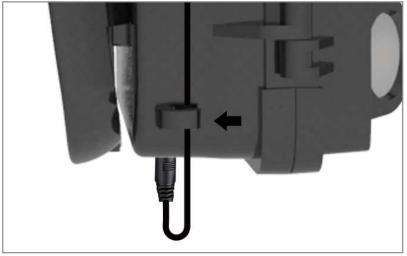



## MEMORY CARD INSTALL

# INSTALL MICRO-SD CARD

1. Insert the Micro SD card with the contacts facing away. The Micro SD card should slide in freely with little resistance. Continue pressing the card inward until you hear a click. This means the Micro SD card is locked in place and ready for use.

2. To remove Micro SD card, press the card inwards to release.

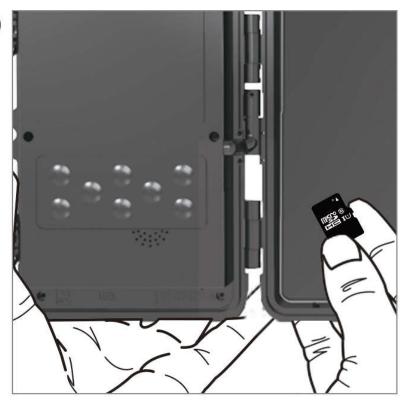

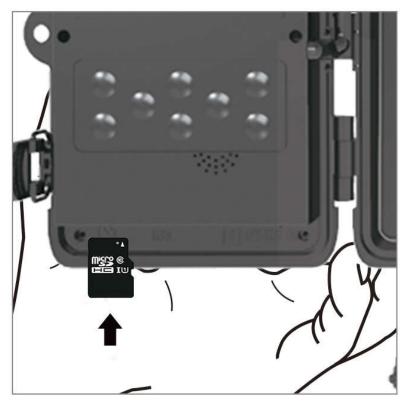

# **QUICK START**


### **Enter to TEST mode**

Slide the mode switch from OFF to TEST position to activate the camera and view the user setup screen.



There is a control panel with 8 keys when you open the camera.

## **OPERATING BUTTONS**

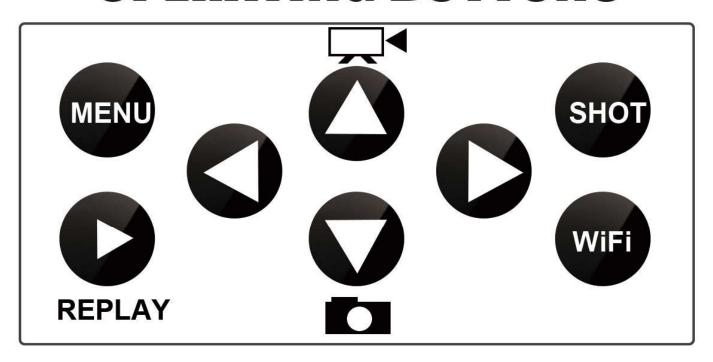

MENU: Open the Settings menu using the MENU button

REPLAY: Press this button to start the replay mode

: Change to the manual recording mode for video recordings

: Change to the manual recording mode for taking photos

**SHOT:** Manually take a video or photo depending on the set recording mode. Video recordings are ended by pressing the SHOT button

WiFi: Press it to start WiFi, press it again to stop

## **Wi-Fi Setting**

### 3 Steps to use your Wi-Fi Trail Camera

1. Connect the remote control to camera.

There is a small remote control key in the box, which is used to turn on / turn off camera's Wi-Fi.

1). Move the power switch to "TEST" to turn on the camera, press the camera's Wi-Fi switch, there will be red flash.



 press "ON" of remote control key, its red light and camera's red light go out at the same time, that means the remote control key has connected to your camera successfully.




#### 2. Connect the camera to App

You can search WiFiCamera to download App from Google play and Apple Store.

1.) On "TEST" mode, press "WiFi" to open camera's App mode.



2.) In your camera's WLAN, you will find this SSID

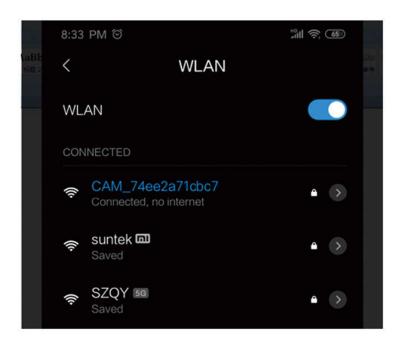

3.) Fill in the password 12345678, then Wi-Fi connected




4.) press "WiFi" to return to system menu, then move power switch to ON mode.

#### 3. Open the App to preview and download pictures.

1).press "ON" of remote control, there will be blue flash, it means camera's App has turned on,



2.) In your camera's WLAN, you will find this SSID, add this hot point.



3.) open your App, you can preview and download the pictures and videos from camera memory card.



4.) press"OFF"of remote control to turn off camera's Wi-Fi



### Setup Menu



Setup	Sub menu	Description
Mode	Camera, video, camera& video,Timelapse	Taking picture, video, picture and video, taking picture regular
Resolution	1080P,720P,WVGA(480P)	Video Resolution
Video Length	10/30/60/90 Seconds	Each Video max 90 sec, default 10sec
Record Audio	Off , On	Video With Sound

Setup	Sub Menu	Description
Image Size	20MP/16MP/12MP	Image resolution
Interval	1/5/10/30sec,1/5/10/30Min	Max 30 minutes delay
Time Lapse	5/10/30/60 minutes	Take pic every 5min
Sequcence	1/3/6/9 pictures	Max 9 pics one shot
ISO	Auto/100/200/400	Exposure level
PIR Sensitivity	High/Medium/Low	Adjust PIR sensitivity
Language	UK/FR/ES/RU/POR/IT/DE	7 languages
Frequency	50Hz /60Hz	Screen refresh rate
Camera ID	CAM000	6 numbers or letters
Password	Off /On	4 numbers
Working Timer	00:00:00 to 23:59:59	N/L
Date /Time	DD/MM/YY	N/L
Format	Cancel / OK	Format memory card
Default Setting	Cancel / OK	Back to default
Version	V2.0	Firmware Version

## WARRANTY

With great pride and full confidence in products, we always keep our words which are given to our customers as specified warranty terms and services below. Based on a strict QC system, we initially offer all our customers one-year long time limited warranty.

Our products are warranted against defects in materials and workmanship for a period of one year from the date of original purchase. If a defect exists, we will, at our option and to extent permitted by law will

- (1) repair the product at no charge using new or refurbished parts;
- (2) exchange the product with a functionally equivalent product that is new or refurbished.

This warranty excludes damage from abuse, accident, modifications or others that are not defects in materials and workmanship. This warranty only covers failures due to defects in materials or workmanship under normal usage. To obtain warranty service, please contact us to determine the nature of problem before return the product under this warranty (with a written description of the problem and print samples) for repairing or exchanging.