

How to use SD card storage the video and image?

1. Format the SD card and set the recorder and pictures Percentage
2. Set SD Card storage
 - 2.1 schedule time and video type （ONLY section,cannot choose all day）

Edit Schedule

Mon Tues Wed Thur Fri Sat Sun

☐ All Day Timing ▼

☒ Section

Time Period	Start Time	End Time	Video Type
1	09:00	10:00	Motion And Alarm ▼
2	14:00	18:00	Motion And Alarm ▼
3	00:00	00:00	Timing ▼
4	00:00	00:00	Timing ▼
5	00:00	00:00	Timing ▼
6	00:00	00:00	Timing ▼
7	00:00	00:00	Timing ▼
8	00:00	00:00	Timing ▼

Copy to Week ☒ Select All

☒ Mon ☒ Tues ☒ Wed ☒ Thur ☒ Fri ☒ Sat ☒ Sun

2.2 After set,Enable the motion detection,then SD card will record the section time video.

3.Enable the motion detection

3.1 set the area and sensitivity

Configuration

Live View Configuration Log Playback

Parameter Configuration

- Local Configuration
- System
- Network
- Audio/Video
- PTZ
- Image
- Safety
- Event**
- Storage


Motion Detection Video Tampering Exception

☒ Enable Motion Detection

Area Setting

Clear All Sensitivity 50


3.2 Set motion detection time

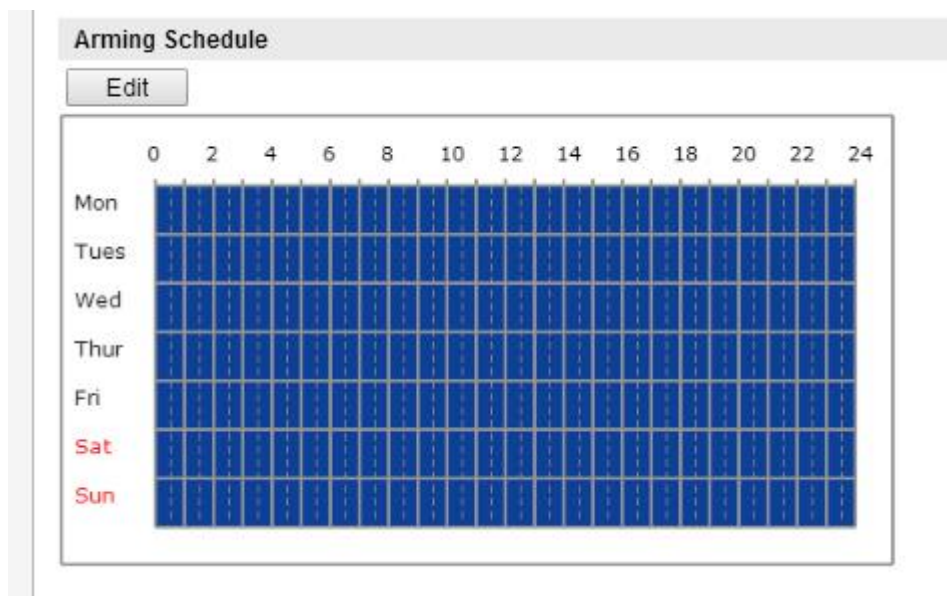

3.3 Select “Trigger channel” and “capture storage SD card”

Linkage Method	
Normal Linkage <input type="checkbox"/> Audible Warning <input type="checkbox"/> Notify Surveillance Center <input checked="" type="checkbox"/> Trigger Channel <input checked="" type="checkbox"/> Capture <input type="checkbox"/> Capture Upload FTP <input type="checkbox"/> Capture Upload Mail <input checked="" type="checkbox"/> Capture storage SD card	Other Linkage Trigger Alarm Output <input checked="" type="checkbox"/> Select All

3.4 After set success,“search” the playback for the video and image

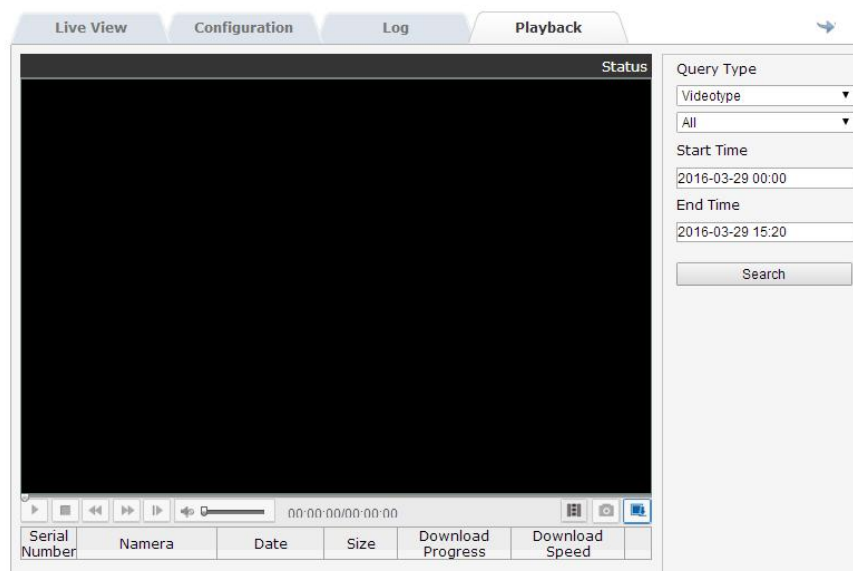

3.5 If cannot find the image or recorder on “playback”,check the “Log”if Motion detection is triggered.If not trigger,reset the motion detection.If trigger,check the schedule recorder is set as motion detection type.