



6,98" -Tablet-PC SX7.slim

mit UMTS 3G, GPS, BT

DE

BEDIENUNGSANLEITUNG

6,98" -Tablet-PC SX7.slim

mit UMTS 3G, GPS, Bluetooth & Android 4.4

INHALTSVERZEICHNIS

IHR NEUER TABLET-PC	6
Produkteigenschaften	7
Lieferumfang	7
WICHTIGE HINWEISE ZU BEGINN	8
Sicherheit	8
Entsorgung von elektrischen und elektronischen Geräten	9
Hinweise zur Nutzung dieser Bedienungsanleitung	9
PRODUKTDDETAILS	11
Frontansicht	11
Rückansicht	12
INBETRIEBNAHME	14
Akku laden	14
SIM-Karte einsetzen	15
Micro-SIM-Karte einsetzen	16
microSD-Karte einsetzen und entnehmen	17

ERSTE SCHRITTE	18
Gerät ein- und ausschalten	18
Kurzeinführung	20
Startbildschirm	22
Benachrichtigungsleiste	24
Übersicht „Alle Apps“	25
ANHANG	26
Technische Daten	26
Konformitätserklärung	27
GPL-TLizenztext	28

Informationen und Antworten auf häufige Fragen (FAQs) zu vielen unserer Produkte sowie ggfs. aktualisierte Handbücher finden Sie auf der Internetseite:

www.touchlet.de

Geben Sie dort im Suchfeld die Artikelnummer oder den Artikelnamen ein.

IHR NEUER TABLET-PC

Sehr geehrte Kundin, sehr geehrter Kunde,

vielen Dank für den Kauf dieses Tablet-PCs. Mobiles Surfen über UMTS 3G, weltweite Positionsbestimmung über GPS und kabellose Bluetooth-Verbindungen machen das SX7.slim zum idealen Begleiter in allen Situationen. Mit dem leistungsstarken Vierkern-Prozessor gehen selbst anspruchsvolle Aufgaben schnell und flüssig von der Hand.

Bitte lesen Sie diese Bedienungsanleitung und befolgen Sie die darin aufgeführten Hinweise und Tipps, damit Sie Ihr neues SX7.slim optimal einsetzen können.

Produkteigenschaften

- Fast rahmenloses 6,98"-IPS-Display (17,7 cm) im praktischen 16:9-Format
- Betriebssystem: Andoid 4.4
- Schnelle Hardware: Quad-Core-Prozessor mit 1,2 GHz
- Umfangreiches Google App-Pack und Memopal Cloud Speicher vorinstalliert
- Variabler Speicher bis 32 GB auf microSD-Karte
- Telefonieren und mobiles Surfen mit UMTS 3G (Dual-SIM)
- Weltweite Positionsbestimmung über GPS
- Kabellose Bluetooth-Verbindung

Lieferumfang

- Tablet-PC SX7.slim
- USB-Kabel
- Netzteil
- Bedienungsanleitung

WICHTIGE HINWEISE ZU BEGINN

Sicherheit

- Diese Bedienungsanleitung dient dazu, Sie mit der Funktionsweise dieses Produktes vertraut zu machen. Bewahren Sie diese Anleitung daher stets gut auf, damit Sie jederzeit darauf zugreifen können.
- Bitte verwenden Sie das Produkt nur in seiner bestimmungsgemäßen Art und Weise. Eine anderweitige Verwendung führt eventuell zu Beschädigungen am Produkt oder in der Umgebung des Produktes.
- Ein Umbauen oder Verändern des Produktes beeinträchtigt die Produktsicherheit. Achtung Verletzungsgefahr!
- Öffnen Sie das Produkt niemals eigenmächtig. Führen Sie Reparaturen nie selbst aus!
- Behandeln Sie das Produkt sorgfältig. Es kann durch Stöße, Schläge oder Fall aus bereits geringer Höhe beschädigt werden.
- Halten Sie das Produkt fern von extremer Hitze.
- Tauchen Sie das Produkt niemals in Wasser oder andere Flüssigkeiten.
- Technische Änderungen und Irrtümer vorbehalten!





Entsorgung von elektrischen und elektronischen Geräten

Ihr neues Produkt wurde mit größter Sorgfalt entwickelt und aus hochwertigen Komponenten gefertigt. Trotzdem muss das Produkt eines Tages entsorgt werden. Die durchgestrichene Mülltonne bedeutet, dass Ihr Produkt am Ende seiner Lebensdauer getrennt vom Hausmüll entsorgt werden muss. Bitte bringen Sie in Zukunft alle elektrischen oder elektronischen Geräte zu den eingerichteten kommunalen Sammelstellen in Ihrer Gemeinde. Diese nehmen Ihre Geräte entgegen und sorgen für eine ordnungsgemäße und umweltgerechte Verarbeitung. Dadurch verhindern Sie mögliche schädliche Auswirkungen auf Mensch und Umwelt, die sich durch unsachgemäße Handhabung von Produkten am Ende von deren Lebensdauer ergeben können. Genaue Informationen zur nächstgelegenen Sammelstelle erhalten Sie bei Ihrer Gemeinde.

Hinweise zur Nutzung dieser Bedienungsanleitung

Um diese Bedienungsanleitung möglichst effektiv nutzen zu können, finden Sie hier vorab einige Begriffe und Symbole erläutert, die Ihnen im Verlauf dieser Anleitung begegnen werden.

- **Verwendete Symbole**


	Dieses Symbol steht für mögliche Gefahren und wichtige Informationen im Umgang mit diesem Produkt. Es wird immer dann verwendet, wenn Sie eindringlich auf etwas hingewiesen werden sollen.
	Dieses Symbol steht für nützliche Hinweise, Zusatzinformationen und Tipps zur Verwendung, die Ihnen im Umgang mit dem Produkt helfen sollen.

- **Verwendete Textmittel**

GROSSBUCHSTABEN	Großbuchstaben werden verwendet, wenn es gilt Tasten, Anschluss- oder andere Produkt-Beschriftungen kenntlich zu machen.
Fettschrift	Fettschrift wird eingesetzt, wenn Menüpunkte oder genau so bezeichnete Ausdrücke in der Software des Produktes verwendet werden.
1. Aufzählungen 2. Aufzählungen 3. Aufzählungen	Aufzählungen werden verwendet, wenn Sie eine bestimmte Reihenfolge von Schritten befolgen oder die Merkmale des Produktes beziffert werden sollen.
• Unterpunkte • Unterpunkte • Unterpunkte	Unterpunkte werden verwendet, wenn mehrere Informationen aufgelistet werden. Sie dienen hauptsächlich zur besseren Hervorhebung der einzelnen Informationen.


PRODUKTDDETAILS

Frontansicht

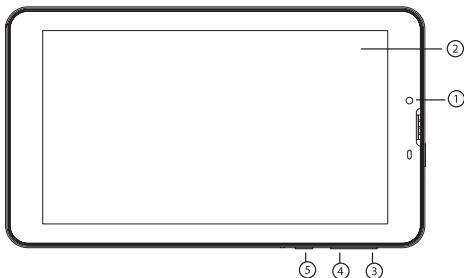

①	Vorderes Kameraobjektiv	Diese Kamera kann verwendet werden, um Fotos und Videos aufzunehmen.
②	Display	Kapazitiver Touchscreen, 1280 × 720
③	Lautstärke +	Drücken Sie diese Taste, um die Lautstärke der Audiowiedergabe zu erhöhen.
④	Lautstärke -	Drücken Sie diese Taste, wenn Sie die Lautstärke der Audiowiedergabe verringern möchten.
⑤	Ein/Aus-Taste	Drücken Sie diese Taste lange, um das Tablet ein- bzw. auszuschalten. Drücken Sie sie kurz, um das Tablet in den Ruhezustand zu versetzen oder aus diesem zu erwecken.

Rückansicht

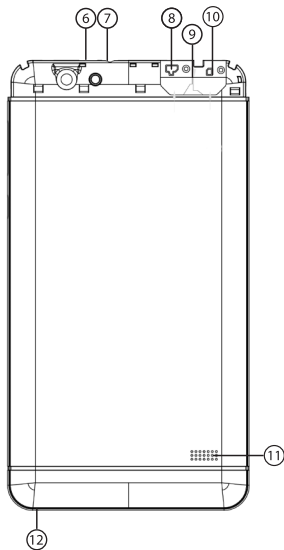

⑥	Micro-USB-Anschluss	Schließen Sie hier das Tablet an einen Computer an, um Daten zu übertragen. Schließen Sie hier das Netzteil an, um das Tablet aufzuladen.
⑦	Kopfhöreranschluss	Schließen Sie hier über ein 3,5-mm-Klinkenkabel Lautsprecher oder Kopfhörer zur externen Audiowiedergabe an.
⑧	microSD-Kartenslot	Setzen Sie hier eine microSD-Speicherkarte ein, um den Speicher des Tablets zu erweitern.
⑨	SIM-Kartenslot	Setzen Sie hier eine SIM-Karte ein, um die 3G-Funktionen des Tablets nutzen zu können.
⑩	Micro-SIM-Kartenslot	Setzen Sie hier eine Micro-SIM-Karte ein, um die 3G-Funktionen des Tablets nutzen zu können.
⑪	Lautsprecher	Zur Wiedergabe von Audiosignalen
⑫	Mikrofon	Zur Aufnahme von Audiosignalen

INBETRIEBNAHME


Akku laden

Bevor Sie das Tablet das erste Mal verwenden, müssen Sie den Akku laden.



HINWEIS:

Bei einer vollständigen Entladung des Akkus lässt sich das Gerät möglicherweise nicht mehr einschalten. Laden Sie es in diesem Fall einige Minuten auf, bevor Sie es erneut versuchen.

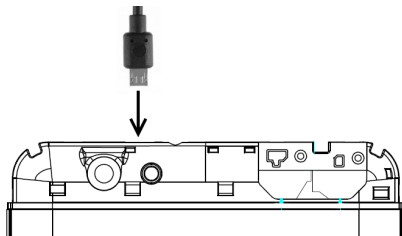

1. Stecken Sie den Stecker des Netzteils in den Micro-USB-Anschluss des Tablets.
2. Stecken Sie das Netzteil in eine Netzsteckdose. Eine Grafik auf dem Display des Tablets zeigt an, dass das Gerät aufgeladen wird.
3. Wenn der Akku vollständig geladen ist, trennen Sie das Netzteil vom Tablet und ziehen Sie es anschließend aus der Steckdose.




HINWEIS:
Laden Sie das Tablet nur mit dem Netzteil auf!

SIM-Karte einsetzen

Um die 3G-Funktion des Tablets zu nutzen, müssen Sie eine SIM- oder eine Micro-SIM-Karte einsetzen.




HINWEIS
Schalten Sie das Tablet aus, bevor Sie die SIM-Karte einsetzen.



Ziehen Sie das Schutzcover ab und setzen Sie eine SIM-Karte in den unteren Kartenslot ein wie auf der Zeichnung angegeben. Schieben Sie die Karte so weit wie möglich in den Slot, schieben Sie aber nicht zu fest und wenden Sie keine Gewalt an. Um die SIM-Karte zu entnehmen, ziehen Sie den kleinen Metallriegel links neben der SIM-Karte ein Stück hinaus und ziehen Sie anschließend die SIM-Karte hinaus. Setzen Sie dann das Schutzcover wieder auf.


Micro-SIM-Karte einsetzen

Um die 3G-Funktion des Tablets zu nutzen, müssen Sie eine SIM- oder eine Micro-SIM-Karte einsetzen.

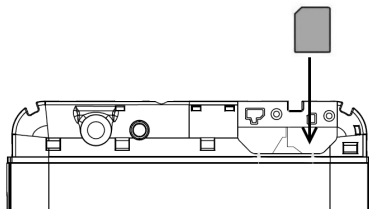

Ziehen Sie das Schutzcover ab und setzen Sie eine Micro-SIM-Karte in den unteren Kartenslot ein wie auf der Zeichnung angegeben. Schieben Sie die Karte so weit wie möglich in den Slot, schieben Sie aber nicht zu fest und wenden Sie keine Gewalt an.

microSD-Karte einsetzen und entnehmen



Schalten Sie das Tablet aus. Ziehen Sie das Schutzcover nach oben ab. Setzen Sie eine microSD-Speicherkarte in den Kartenslot wie auf der Zeichnung auf dem Gerät angegeben. Schieben Sie nicht zu fest und wenden Sie keine Gewalt an. Die Speicherkarte ist richtig eingesetzt, wenn sie leicht einrastet und nicht von selbst wieder herausgleitet. Schalten Sie das Tablet ein.





ACHTUNG

Setzen Sie die microSD-Karte nur ein, wenn das Tablet ausgeschaltet ist.

Um die Speicherkarte zu entnehmen, ziehen Sie sie einfach wieder heraus. Setzen Sie anschließend das Schutzcover wieder auf.



HINWEIS:

*UM Datenverlust zu vermeiden, sollten Sie das Einsetzen und Entnehmen der microSD-Karte nur vornehmen, wenn das Tablet ausgeschaltet ist. Alternativ können Sie bei eingeschaltetem Tablet die microSD-Karte entnehmen, wenn Sie sie vorher deaktivieren. Öffnen Sie hierzu die Übersicht „Alle Apps“  und tippen Sie auf **Einstellungen**  und dann **Speicher**. Tippen Sie dann im rechten Fensterbereich auf **SD-Karte entnehmen** und anschließend auf **OK**.*

Um die 3G-Funktion des Tablets zu nutzen, ziehen Sie das Schutzcover ab und setzen Sie eine oder zwei SIM-Karten in den Kartenslot wie auf der Zeichnung angegeben. Schieben Sie nicht zu fest und wenden Sie keine Gewalt an. Um eine SIM-Karte zu entnehmen, ziehen Sie sie einfach wieder heraus. Setzen Sie anschließend das Schutzcover wieder auf.

ERSTE SCHRITTE

Gerät ein- und ausschalten

Halten Sie die Ein/Aus-Taste ⑥ einige Sekunden gedrückt, um das Gerät einzuschalten.



Das Tablet fährt hoch. Wenn Sie eine SIM-Karte eingelegt haben, geben Sie gegebenenfalls die PIN(s) Ihrer SIM-Karte(n) ein und tippen Sie auf **OK**. Wenn Sie das Telefon ohne SIM-Karte verwenden, überspringen Sie diesen Absatz.

**HINWEIS:**

Wenn Sie eine neue SIM-Karte verwenden, müssen Sie eventuell noch erste Einstellungen auf der SIM-Karte vornehmen. Lassen Sie sich hierzu von einem Fachgeschäft beraten.



Das Tablet wählt automatisch Ihren Netzbetreiber. Tippen Sie auf **Schließen**, um den Netzbetreiber zu akzeptieren, oder auf **Ändern**, um ihn zu ändern.

**HINWEIS:**

Beim ersten Einschalten des Tablets wird eine kurze Einführung gestartet.


- **Ruhezustand**

Nach einigen Minuten der Nichtbenutzung schaltet sich das Tablet in einen Ruhezustand. Sie können den Ruhezustand aufheben, indem Sie kurz die Ein/Aus-Taste drücken.


Die Zeit, die bis zum Aktivieren des Ruhezustands vergeht, können Sie einstellen. Öffnen Sie hierzu die Übersicht „Alle Apps“  und tippen Sie auf **Einstellungen**  und dann **Display**. Im rechten Fensterbereich können Sie unter **Ruhezustand** die gewünschte Zeit wählen.

Kurzeinführung

Wenn Sie das Tablet das erste Mal aktivieren, öffnet sich eine kurze Einführung für den Startbildschirm und die Übersicht „Alle Apps“.




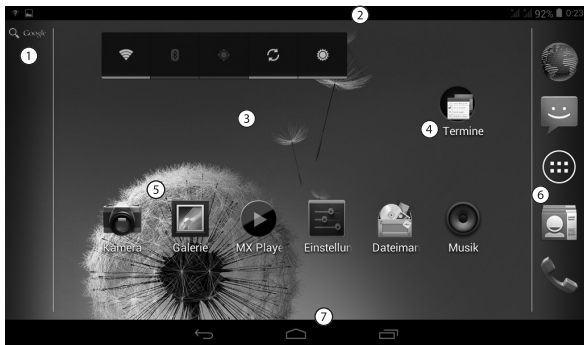
①	Tippen Sie hier, um den ersten Einführungsbildschirm zu schließen.
②	Tippen Sie hier, um die Übersicht „Alle Apps“ zu öffnen.



① Tippen Sie hier, um den zweiten Einführungsbildschirm zu schließen.

Startbildschirm

Nach dem Einschalten des Tablets öffnet sich der Startbildschirm. Hier können Sie Ihre favorisierten Apps ablegen. Indem Sie das Startbildschirm-Icon  oder die Startseite-Taste drücken, kehren Sie jederzeit zu diesem Bildschirm zurück.



① Tippen Sie auf diesen Punkt, um das Tablet oder das Internet zu durchsuchen.




② Dies ist die Benachrichtigungsleiste. Hier finden Sie grundlegende Benachrichtigungen über die aktuelle Zeit, den Ladezustand oder eventuelle Verbindungen (WLAN, USB etc.). Ziehen Sie die Leiste herunter, um die Benachrichtigungen zu öffnen.

③	<p>Dies ist der Hauptbildschirm. Hier können Sie Ihre favorisierten Apps ablegen. Streichen Sie mit dem Finger nach links oder rechts, um weitere Bereiche des Bildschirms anzuzeigen.</p> <p>Tippen Sie auf eine freie Stelle des Startbildschirms und halten Sie ihn gedrückt, um das Hintergrundbild zu ändern. Wählen Sie anschließend, ob das Hintergrundbild aus der Galerie, den gespeicherten Hintergrundbildern oder den Live-Hintergründen (interaktive, animierte Hintergrundbilder) stammen soll.</p>
④	<p>Dies ist ein "Ordner", eine Gruppierung mehrerer Apps. Halten Sie einfach eine App gedrückt und ziehen Sie sie auf eine andere, um die Anwendungen zu einer Gruppe zusammenzufassen. Tippen Sie auf den Ordner, um ihn zu öffnen. Tippen Sie auf den Namen des Ordners, um ihn umzubenennen.</p>
⑤	<p>Öffnen Sie häufig verwendete Apps, indem Sie sie antippen. Wenn Sie eine App vom Startbildschirm entfernen möchten, halten Sie sie mit dem Finger gedrückt, bis am oberen Bildschirmrand ein X erscheint, und ziehen Sie sie anschließend auf das X. Lassen Sie sie dort los.</p>
⑥	<p>Dies ist die Favoritenleiste. Die App-Symbole, die sich in dieser Leiste befinden, erscheinen auf jedem Startbildschirm.</p> <p>Das Symbol Alle Apps ist in der Mitte fixiert. Wenn Sie auf dieses Symbol tippen, werden alle Ihre Apps und Widgets angezeigt.</p>
⑦	<p>Dies ist die Steuerungsleiste. Hier werden Ihnen einige Steuerelemente angezeigt. Details finden Sie im nächsten Abschnitt.</p>


Benachrichtigungsleiste

Die Benachrichtigungsleiste bietet Ihnen einige Steuerelemente, die immer angezeigt werden, sowie einige grundlegende Benachrichtigungen über die aktuelle Zeit, den Ladezustand oder eventuelle Verbindungen (WLAN, USB etc.).



①	Zurück 	Tippen Sie auf dieses Symbol, um zum vorherigen Bildschirm / zur vorherigen Seite zurückzukehren und um Anwendungen / Menüs zu schließen.
②	Startbildschirm 	Tippen Sie auf dieses Symbol, um jederzeit zum Startbildschirm zurückzukehren.
③	Kürzlich verwendete Apps 	Tippen Sie auf dieses Symbol, um eine Liste der kürzlich verwendeten Anwendungen anzuzeigen. Sie können mit dem Finger nach oben und unten streichen, um durch die Liste zu scrollen. Rufen Sie eine App auf, indem Sie auf sie tippen.

Übersicht „Alle Apps“

Über das Übersicht-Symbol  auf dem Startbildschirm gelangen Sie in die Übersicht „Alle Apps“. Hier finden Sie eine Liste aller installierter Apps und Widgets.



①	Hier können Sie die Ansicht zwischen „Apps“ und „Widgets“ umschalten. „Widgets“ sind kleine Zusatzprogramme, die Sie auf dem Startbildschirm ablegen können.
②	Tippen Sie auf dieses Symbol, um den Google-Shop „Google Play“ zu öffnen.
③	Dies sind die installierten Apps. Tippen Sie auf eine App, um sie zu öffnen.
④	Ziehen Sie den Bildschirm mit dem Finger nach oben oder unten, um weitere Apps anzuzeigen.

ANHANG

Technische Daten

Prozessor	MTK8382, QuadCore, 1,2 GHz
Display	Kapazitiver Touchscreen, 6,8" (17,7 cm)
Auflösung	1280 x 720 Pixel
Betriebssystem	Android 4.4
WLAN	150 Mbit (IEEE 802.11 b/g/n)
3G-UMTS	Intern
Maße	188 x 97,5 x 8,1 mm
Akku	Li-Ion, 3,7 V / 2.500 mAh
Frontkamera	0,3 MP
Rückkamera	2 MP
Erweiterbar	microSD, bis 32 GB
Arbeitsspeicher	1 GB DDR3

Konformitätserklärung

Hiermit erklärt PEARL.GmbH, dass sich das Produkt PX-8867 in Übereinstimmung mit der der Niederspannungsrichtlinie 2006/95/EG, der R&TTE-Richtlinie 99/5/EG und der RoHS-Richtlinie 2011/65/EU befindet.



Leiter Qualitätswesen
Dipl.-Ing. (FH) Andreas Kurtasz
20.03.2015

Die ausführliche Konformitätserklärung finden Sie unter www.pearl.de/support.
Geben Sie dort im Suchfeld die Artikelnummer PX-8867 ein.

Dieses Produkt enthält Software, welche ganz oder teilweise als freie Software den Lizenzbedingungen der GNU General Public License, Version 2 (GPL) unterliegt.

Den Quellcode der Software erhalten Sie unter <http://www.pearl.de/support/> unter dortiger Eingabe der Artikelnummer; wir senden Ihnen auf Anforderung (gerne unter opensource@pearl.de) den SourceCode auch auf einem handelsüblichen Datenträger, dessen Herstellungskosten wir im Gegenzug geltend machen; den vollständigen Lizenztext ersehen Sie nachfolgend. Näheres, insbesondere auch dazu, warum es keine offizielle deutsche Übersetzung der Lizenzbedingungen gibt, erfahren Sie unter <http://www.gnu.org/licenses/gpl-2.0.html>.

Da es sich um freie Software handelt, schließen die Entwickler dieser Software die Haftung, soweit gesetzlich zulässig, aus.

Bitte beachten Sie, dass die Gewährleistung für die Hardware davon natürlich nicht betroffen ist und in vollem Umfang besteht.

Weitere Fragen beantworten wir Ihnen gerne unter opensource@pearl.de.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

*Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA*

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

1. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The „Program“, below, refers to any such program or work, and a „work based on the Program“ means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term „modification“.) Each licensee is addressed as „you“.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

2. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

3. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
 - a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
 - b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
 - c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

4. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
 - a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 - b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 - c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

5. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
6. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

7. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

8. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

9. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
10. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and „any later version“, you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

11. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

12. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM „AS IS“ WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

13. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the „copyright“ line and a pointer to where the full notice is found.

one line to give the program's name and an idea of what it does.

Copyright (C) yyyy name of author

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

*Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'. This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.*

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items - whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a „copyright disclaimer“ for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

signature of Ty Coon, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

Kundenservice: 07631 / 360 - 350
Importiert von:
PEARL.GmbH | PEARL-Straße 1-3 | D-79426 Buggingen

© REV3 / 20. 03.2015 - EB/MB//BS/TH//BR