




LED BLUETOOTH HEADPHONES CT-7

USER MANUAL

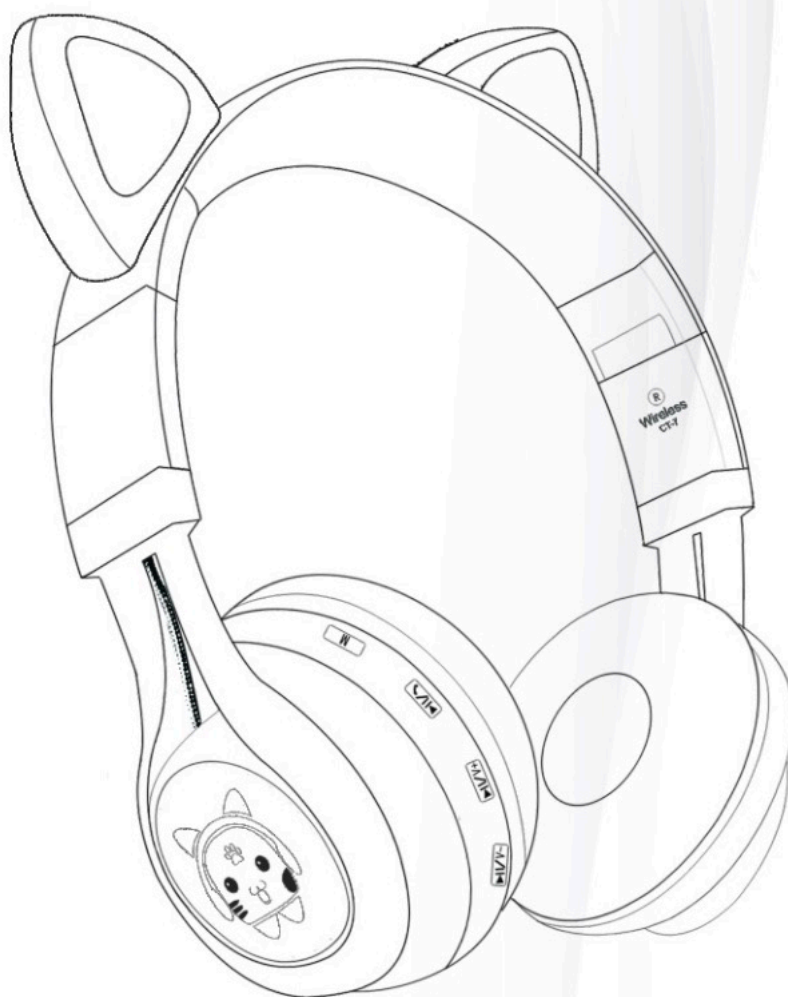

Designed & Produced by Riwbox
www.riwbox.com

INTRODUCTION

RIWBOX bluetooth stereo bass headphones are designed base on the advanced bluetooth V4.2, providing maximum 10 meter operating range, An auxiliary input cable also included for use as a wired headphones with non-Bluetooth audio sources, or in case of the internal rechargeable battery is exhausted.

BOX CONTENTS

- One foldable Multifunction Bluetooth headset "CT-7"
- One charging cable
- One Aux-in cable
- One User's Manual

SPECIFICATIONS

Bluetooth Version: V4.2

Support Profile: AVRCP.TS.1.6.0/A2DP.TS.1.3.1/HFP.TS.1.7.0/RF.TS.4.2.0/BB.TS.4.2.0

Working Distance Range: 10m

Frequency Range: 2.402GHz-2.480GHz

Battery Specifications: 3.7V, 300mAh, Built-in rechargeable lithium battery


Charging Voltage: DC4.2 - 5.5V

Charging Time: about 2 hours

Talking/Music time: about 5 hours

Standby Time: about 10 hours

KEYS AND FUNCTION

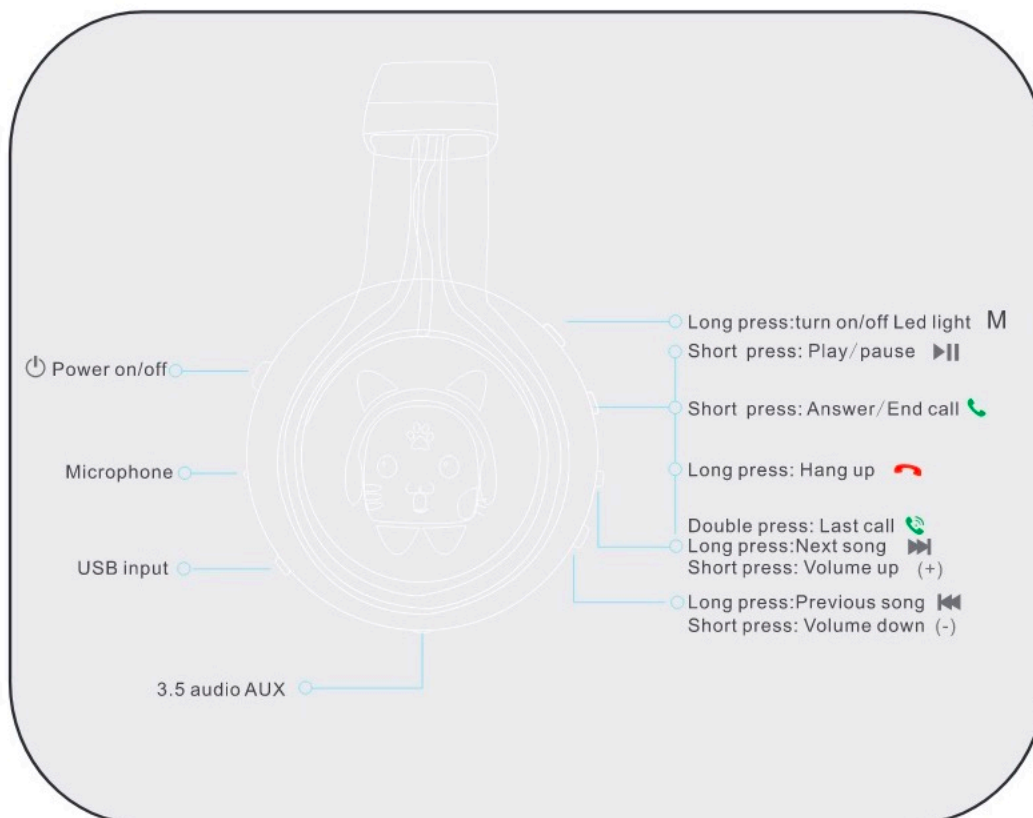

4.Reject Calls:

Long press ► ||.

5. Redial the last outgoing number:

Double-click ► ||.

6. Music Play:

Short press ► || after connected with the smart device.

Micro SD Card playback Mode:

1) When the slot is empty, inserted the Micro SD Card, voice prompts "TF Mode". Then it plays media automatically.

2) When the Micro SD Card is inside, switch to TF Mode through M.

FM Radio Mode:

1) When the headset is turn on, switch to FM mode through "M", voice prompts "Radio Mode".

2) Usage Tips: short press "► ||" to search and save stations automatically(it can be abort with another short press while searching). Once enter FM mode again, it will play the first saved radio station automatically. If you want to re-scan, short press "► ||" again in the Radio mode.

Line-in Mode:

When the headset is turn on, insert the Line-in cable, voice prompts "Line-in Mode". Then it plays smart device's media automatically.

1. Maximum volume warning voice prompts "du du".

2. Supports MP3, WAV, WMA format playback.




3. Battery indication on IOS.

4. Micro USB as common use charging port.

Auxiliary input cable with in-line mic wired Use



3.5mm Jack Cable
Keep connected even battery ran out

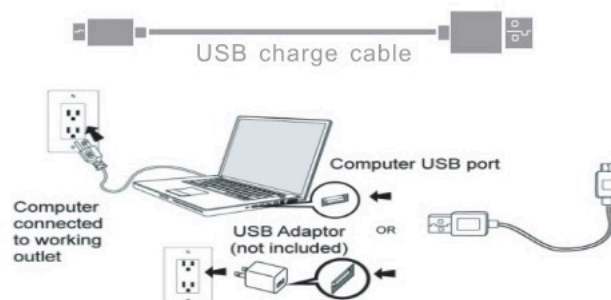

7.Charge

Before charge , turn off the headphone, the headset charging cable connect to the computer USB pilot lamp turn in green, it means connect with USB successfully, headphone is charging, Built-in battery capacity overload protection detection system, no need worrying about the battery long,piolt lamp turns off means charge finished

8.LED indicator light Status

Charge Status	Steady red LED. When fully charged, the LED indicator light turns off.
Power on Status	Blue LED indicator light turns on.
Power off Status	LED indicator light turns off.
Pairing Status	Blue and Red LED indicator lights rapidly alternating flash.
Standby Status	Blue LED indicator light turns on.
Connected Status	Blue LED indicator light turns on.
Using Status	Bluetooth Mode, Blue LED indicator light flashes every two seconds.
	Radio Mode, Green LED indicator light turns on.
	TF Mode, Green LED indicator light flashes every three seconds.
	AUX-in Mode, the headset automatically turns off, LED light goes out.

Note:

- ★ Please make sure to turn off the power when charging.⚡⚠
- ★ When you receive the headphone, please send your order number to the after-sale e-mial address: Support@riwbox.com.
Your order will be guaranteed and your warranty will be extended.

FAQ

- ★ If there is any problem please do not hesitate to contact
E-mail:support@riwbox.com

More About Us



Riwbox



@Riwbox001



Riwbox001

Riwbox Technology Co. Limited
4061 Filhurst Ave, Baldwin Park,CA 91706, USA
Email : support@riwbox.com
Website : https://www.riwbox.com

⚠ Continuous use at high volume might damage hearing