

SMOK®

Species Kit

SMOK[®]

Introduction

The 2nd generation of the mysterious creature from the outer space—the Species dominates the whole universe again, who perfectly combines the vaping and high-tech to bring you wonderful vaping experiences. Species has an angular mod with hard lines, which reflects its sublime heroism. The front brand new 1.45" high-definition touch screen with upgraded user interface offers you more comprehensive and clearer vaping data, while the back classic cobra pattern reveals its domineering potential. Moreover, the screen locking button ensures a safe operation. And its 1W-230W output can meet your various demands. Species uses the newly developed TFV8 Baby V2 tank and adopts two powerful coils— Baby V2 A1 Coil with super large heating area and Baby V2 A2 Coil with dual heating cores, fully satisfying the vaping fans' pursuit of dense flavor and massive cloud. Innovation keeps changing the vaping experience!

The Kit Includes:

- 1 x Species Mod
- 1 x TFV8 Baby V2 Tank
- 1 x Baby V2 A1 0.17 Ω Single Coil(Pre-installed)
- 1 x Baby V2 A2 0.2 Ω Dual Coils
- 1 x Glass Tube Replacement
- 1 x User Manual
- 1 x USB Cable
- Spare Parts

Specifications

Species Mod

Material: Zinc alloy

Size: 82.1*49*30.6mm

Weight: 155g

Power Range: 1W-230W

Standby Current: <500uA

Input Voltage: 6.4V-8.4V

Output Voltage: 0.5V-8.2V

Resistance Range: 0.1Ω-2.5Ω (VW) / 0.05Ω-2Ω (TC)

Temperature Range: 200 °F --600 °F / 100 °C --315 °C

Charging Voltage: 5V

Charging Current: 1.8A

TFV8 Baby V2 Tank

Material: Stainless Steel

Size: 30*54mm

Weight: 65g

Capacity: 5ml

Thread: 510

Verification

1. Using your Smartphone or PC visit the SMOK official website: <http://www.smok-tech.com/support/>
2. Scratch off the coating of the security label on the package to reveal the 16-digit authentication code. Enter it into the input field on the webpage to verify. The result will be displayed after a few seconds.
3. If you have any questions, please contact SMOK via e-mail, phone or our website to get more help.

Welcome to download our APP: Vaping Tour, share your vaping experience and communicate with global vapor fans.



Warranty

Note: Please carefully keep the anti-counterfeiting codes on the package. Only the activated products can get after-sale service.

Species Warranty Period: 6 Months from the Purchase Date.

Within the 6 Months, some items may not be eligible for service due to misuse, damage, or other failures caused other than by manufacturer defects or premature failure. Please contact SMOK Authorized Vendor for more information and terms of service.

The "Species Customer Card" is an important proof for customers to get warranty service, please keep it. And read the card carefully and fill it out correctly. Warranty requests must be accompanied by this card.

For more warranty policies and processes, please visit our official website:
<http://www.smoktech.com/support/>

Components




User Guide

Preparation before use:

- 1) Please make sure the battery you're using corresponds with the BATTERY WARNING CARD.
- 2) Before vaping, please make sure the tank is filled with enough e-juice.

Battery Installation

- 1) Slide and open the battery cover as the picture shows;
- 2) Place the batteries into the device according to the correct directions;
- 3) Close the battery cover.

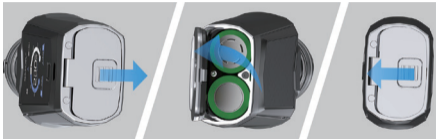

Prompts about battery

- 1) BATTERY HIGH: The single battery voltage is higher than 4.5V.
- 2) BATTERY LOW: The single battery voltage is lower than 3.1V.
- 3) CHECK BATTERY: When the middle wire connection is abnormal.
- 4) PCBA TOO HOT: The internal temperature is too high and the mod would automatically be shut down; you can vape again when the temperature decreases.

Attach Atomizer

Species uses a spring loaded 510 connector. Please be certain that there is nothing between the Mod and the attached atomizer.

- 1) Connect the atomizer to the device and tighten it clockwise.
- 2) After the device is powered on, please press the Fire Key to vape.

Prompts about atomizer

1. NEW COIL: When the resistance value of the newly installed coil is different from the original one by 10mΩ or more. After changing the atomizer, if you press the Fire Key, you'll see a prompt on the screen displaying whether it is a new atomizer or not. Choose "NEW" if it's a new atomizer and choose "OLD" if it's the same one.
2. OHMS TOO LOW: The resistance is lower than the minimal value (In the TC Mode, the minimal value is 0.05Ω; in the VW Mode, the minimal value is 0.1Ω).
3. OHMS TOO HIGH: The resistance is higher than the max value (In the TC Mode, the max value is 2.0Ω; in the VW Mode, the max value is 2.5Ω).
4. ATOMIZER SHORT: The atomizer is short circuited. Please power off and change an atomizer.
5. NO ATOMIZER: There's no atomizer. Please attach an atomizer.

Mod Operations

1. Power On:

While the device is off, fast press and hold the Fire Key 5 times in 2s to power on with "SMOK".

2. Power Off:

Fast press and hold Fire Key for 5 times in 2s with "YES/NO" and choose YES to power off.

3. Vaping:

While the device is on, hold Fire Key to vape (it will be forced to stop working when one vaping time is longer than 10s, release once to vape again);

Quickly press the Fire Key 5 times to lock or unlock.


4. Quick Actions:

1) Press the Fire Key 3 times, the screen and the fire key are locked, and you cannot fire the device. With another three presses you can unlock the screen and vape again.

2) Press and hold the Screen Locking Button for one or two seconds, the screen

can be locked or unlocked, and you can still vape under locked status.

3) Long press fire key for 5 seconds at the state of locking, and you can fine-tune the resistance value.




(Screen Unlock)



(Screen Lock)

5. User Guide:

On the main interface (under unlocked status), touch the menu icon  to enter the menu index interface, and you can easily adjust values on the touch screen of Species:

Note: To perform the interface operation, you need to first unlock the Fire Key, and then long press the screen locking button to unlock the touch function.



1) VW Mode


Drawing effect

Gently press the "VW " icon to enter into "VW Mode"; you can adjust the vaping effect among Soft/Normal/Hard/Max.

Wattage value adjustment

You can set your favorite wattage value by touching -/+ buttons, from 10W to 230W; the wattage value will be fast increased or decreased if you long press the virtual button for more than one second.

If there's no operation in two seconds, it will return to the main interface.



2) TC Mode


Coil type

Gently press the "TC" icon to enter into "TC Mode"; you can choose coil materials among Ti/Ni200/SS.

Wattage value adjustment

You can set your favorite wattage value by pressing "+/-".

TCR Setting

You can adjust the value by touching  /  icon.

If there's no operation in two seconds, it will return to the main interface.




3) Puff Setting

Gently touch the "Puff" icon and enter into sub-menu;

Max Puff: you can set the number of puffs (Never-999P, and "Never" means any number of puffs), and you can adjust the value by pressing +/- icon to increase or decrease;

Puff Already: the puff number you have taken;

Puff Clear: the puff counter clearing function.




4) Screen Setting

Gently touch the "Screen" icon and enter into sub-menu;

Screen Color: There are 6 colors available for screen setting, you can choose your favorite one by a simple touch.

Screen Time: You can set screen time by pressing +/- icon.



5) System Setting

Gently touch the "Settings" icon and enter into sub-menu;

OHM: touch  /  icon to fine-tune the resistance value;

UUID: check the Universally Unique Identifier of your own device;

Factory Reset: touch the icon  to restore the factory settings;

Power Off: touch the icon  to power off the device.



Tank Operation

How to fill with e-liquid

1) Hold the tank in one of your hands; use another one to press button and then move it counterclockwise.



2) Add e-liquid through the slot, and pay attention not to drip into the central airflow tube.



3) Close the cap carefully and firmly. Then let it stand for several minutes to get the organic cotton completely saturated.



Replace atomizer core

First, unscrew the base, then unscrew the coil head from the base, then secure your new coil head onto the base plate (ensure that it is screwed in securely), finally screw the new coil head into the chimney and you're ready to prime your new coil head.



Control air input

Rotate the bottom adjustable airflow system to control air input.



If you need any additional information or have any questions about the products or its use, please contact your local SMOK agent or to visit our website www.smok-tech.com

Attention

1. Before using please read the manual carefully.
2. Connect the atomizer to a power source that is suitable for its intended use.
3. Please avoid getting the e-liquid into your mouth directly.
4. To avoid the e-liquid penetrating into the inside of device that shortens the product life-circle, please remove the atomizer if the device is not used for a long period.
5. Please refill the atomizer when the e-liquid is nearly used out to avoid dry-burning of the atomizer.
6. Please do not drop, throw or mishandle this product as the outer shell or inner components may be damaged.
7. In order to prolong the operation of your product, please keep it away from excessive temperature and humid environment.
8. Please keep this product away from children and pregnant women.



LEGAL DISCLAIMER

Underage sale is prohibited. Depending on your country/region's legal smoking age. 18+ and over 21+ in other countries/regions.

WARNING

This product is not intended for use by persons under legal smoking age, nonsmokers, women who are pregnant or breastfeeding, or persons with or at risk of heart disease, high blood pressure, diabetes, or taking medicine for depression or asthma.

Appendix1 Key Function Table

Key	Function(Screen Unlock Status)	Function(Screen Locked Status)
Fire Key	Fast press 5 times in 2s - with "Power Off? YES/NO", you can choose YES to power off; Fast press 3 times in 2s - Fire Key Locked; Hold on - Vape; Release - Standby	Long press 5 times in 2s– with "POWER Off? YES/NO" to power off; Fast press 3 times - Fire Key Unlocked
Screen Locking Key	Press for 2 seconds -- Screen locked	Press for 2 seconds – Screen unlocked

